

ALIMAK®

SCANDO FC 15/32

Technical Data

CAPACITY

Pay-load capacity	kg	1500
Erection load	kg	1000
Speed	m/min	40
Max. lifting height	meter	120
<i>Increased lifting height on request</i>		
Erection crane capacity	kg	250
Safety device	type	GF

CAGE DIMENSIONS

Internal width x length	meter	1.5 x 3.2
Internal min. height	meter	2.55
Door opening w x h	meter	1.49 x 2.0

ELECTRICAL DATA

Power supply range	380 – 460 V, 50 or 60 Hz, 3 Phase	
At 400 V/50 Hz:		
Rated power cont. duty	kW	2 x 11.0
Power supply fuses	A	63
Starting current	A	75
Power consumption	kVA	35


Data at other voltages on request

WEIGHTS

Base unit weight	kg	3340
Mast section with one rack	kg	130
Mast section with two racks	kg	155
Mast section length	mm	1508

TRANSPORT DIMENSIONS

Base unit incl. enclosure		
Length	meter	3.79
Width (single cage)	meter	2.59
Lowest transport height (Machinery excluded)	meter	3.20

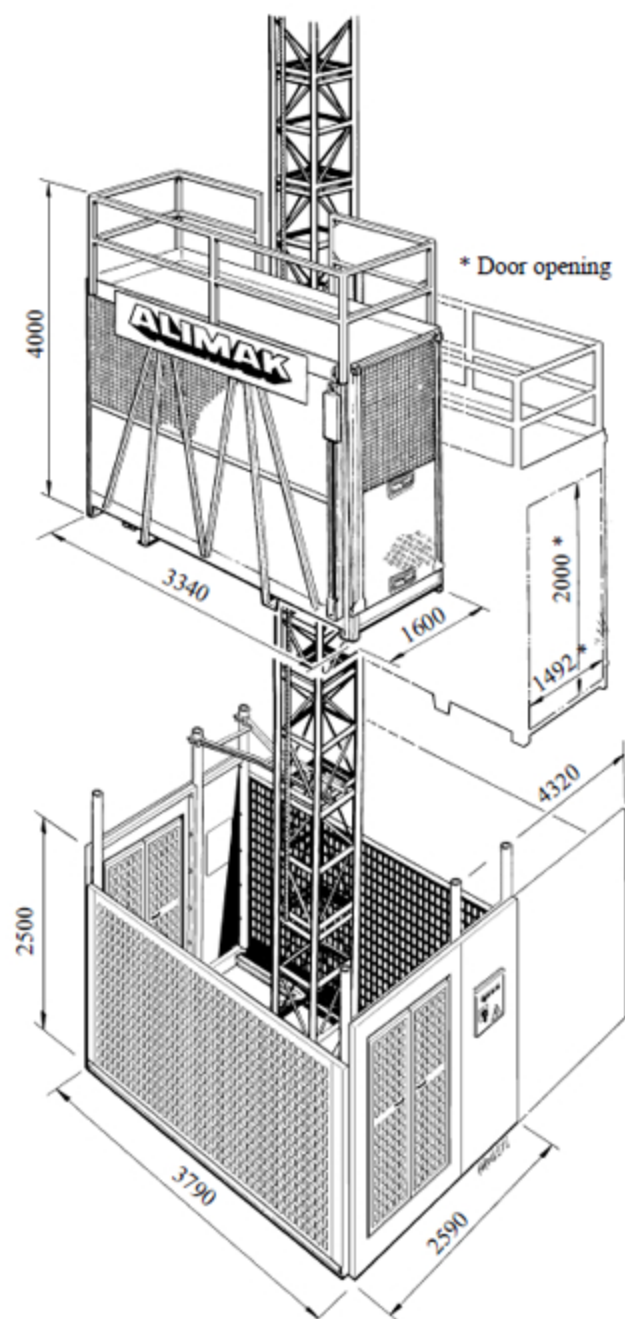

Alimak AB, P O Box 720, Skellefteå, Sweden. Tel: +46 910 87000. Fax: +46 910 56690

Pictures are illustrative only and do not necessarily show the configuration of products on the market at the given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.

Printed in Sweden